

SAILSETC


2006

Graham & Lorna Bantock
 fax + 44 1376 571 437
 tel + 44 1376 570 583

162-Kit, 172-400/350/310 Headsail Boom Kit – One Metre

also useful for 36"R Class

141 high street kelvedon essex england co5 9aa
 e mail technical@sailsetc.com
 © Graham Bantock, Jan 2006

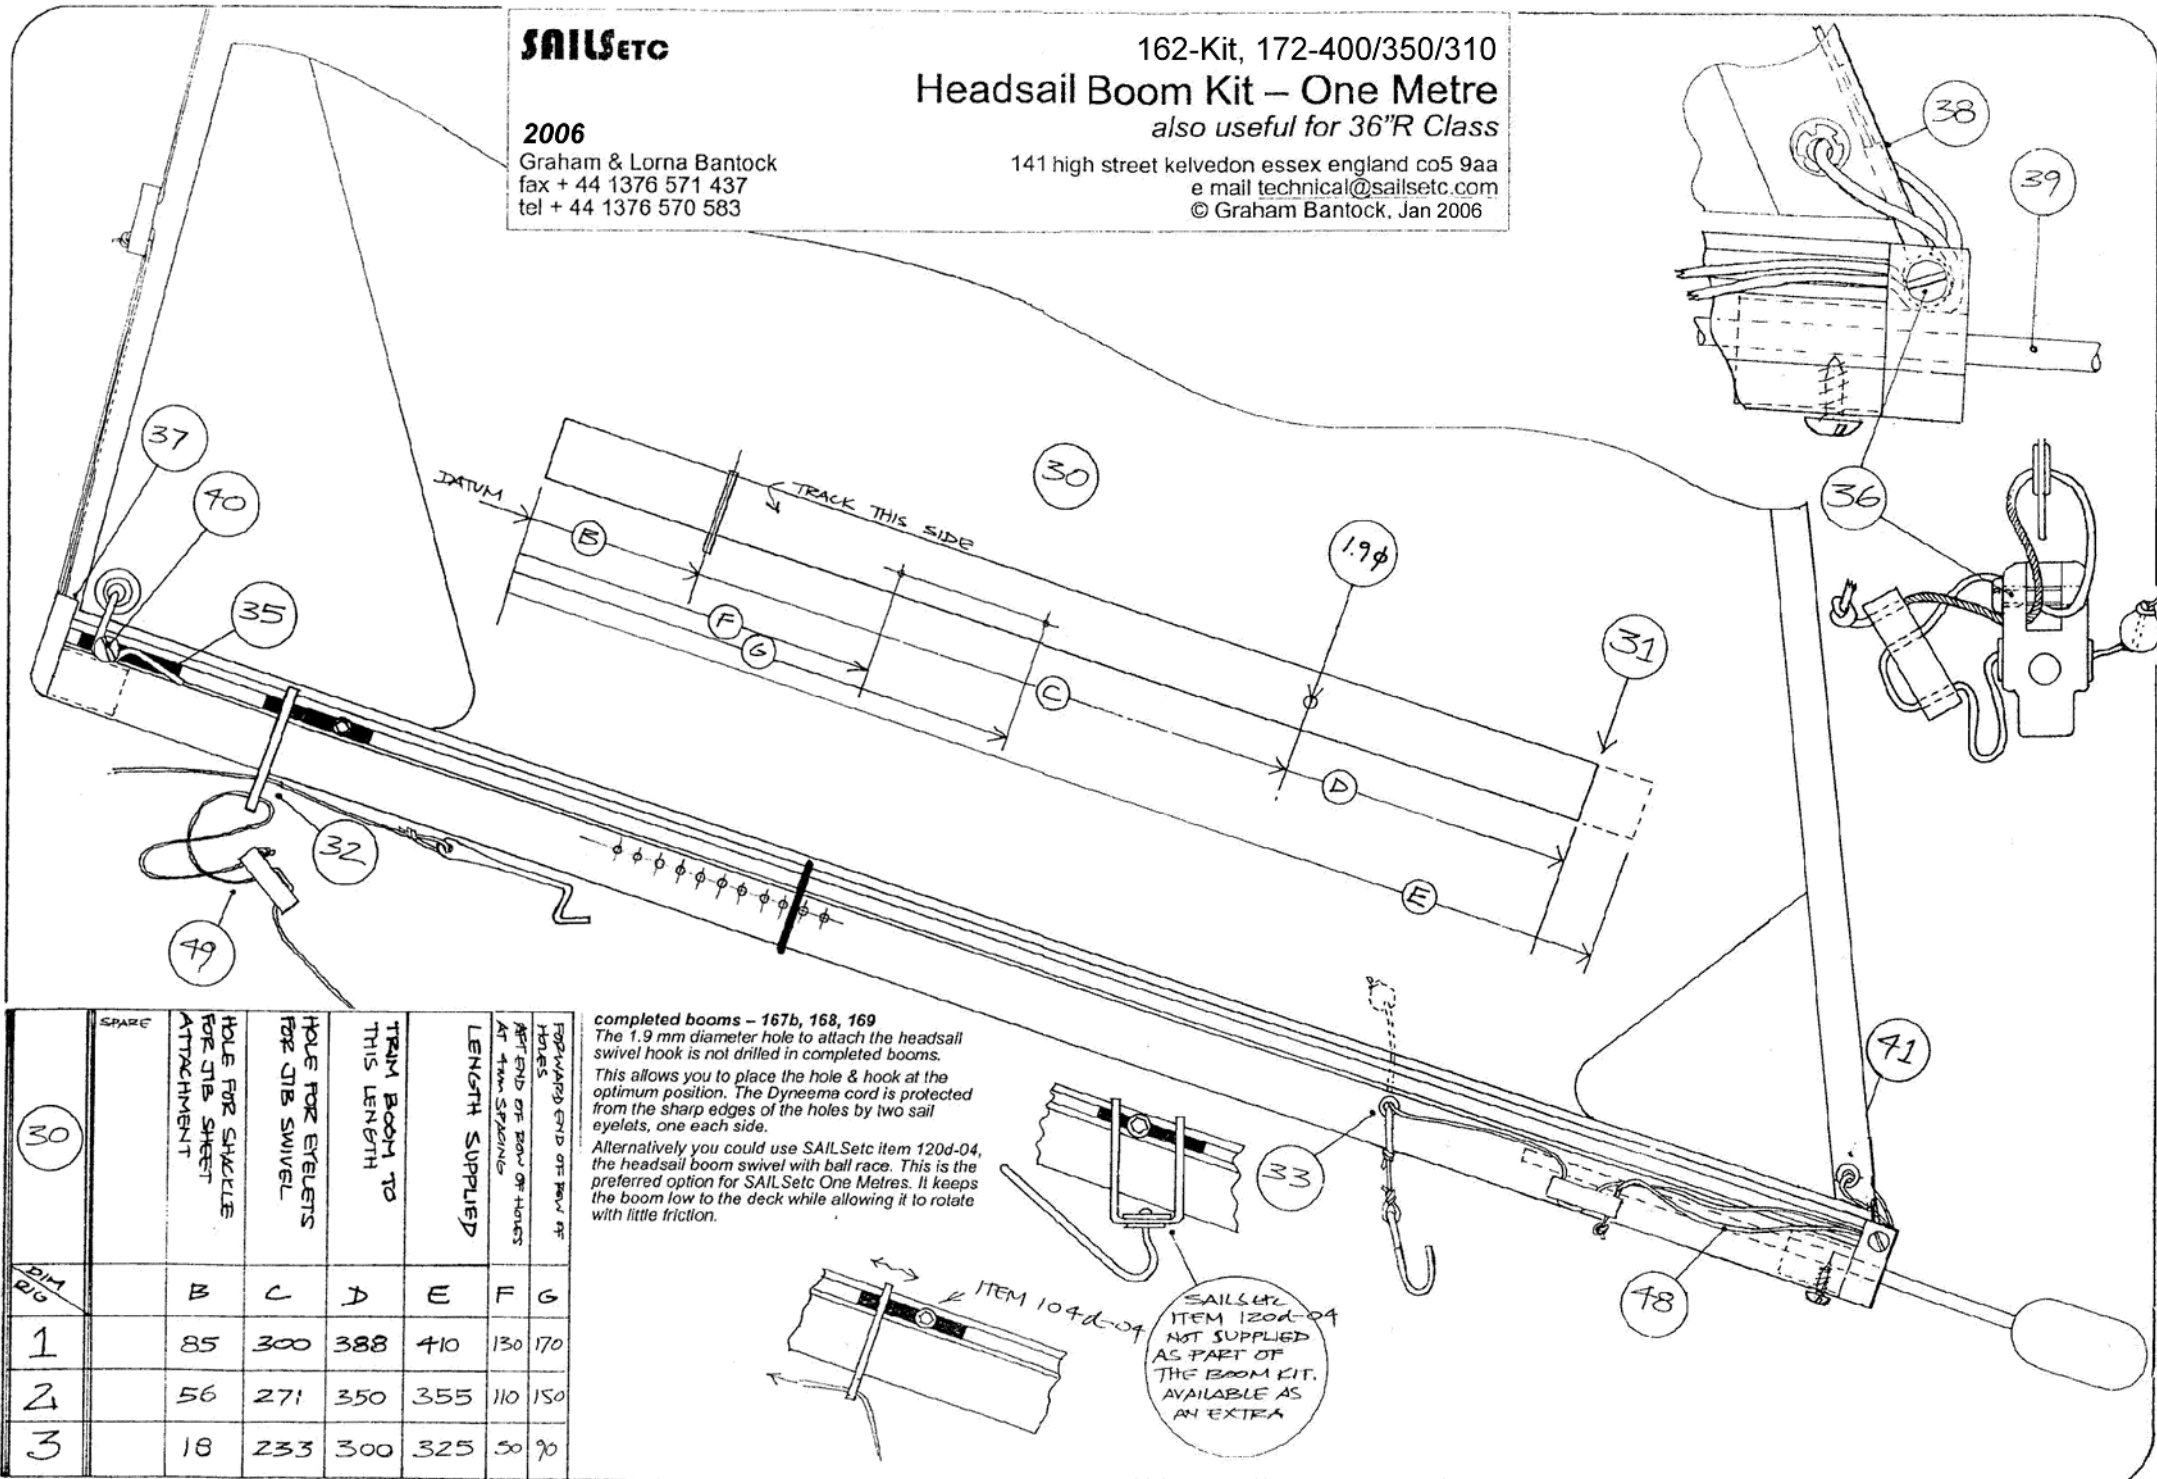

completed booms – 167b, 168, 169

The 1.9 mm diameter hole to attach the headsail swivel hook is not drilled in completed booms.

This allows you to place the hole & hook at the optimum position. The Dyneema cord is protected from the sharp edges of the holes by two sail eyelets, one each side.

Alternatively you could use SAILSetc item 120d-04, the headsail boom swivel with ball race. This is the preferred option for SAILSetc One Metres. It keeps the boom low to the deck while allowing it to rotate with little friction.

| DIM / DIS | LENGTH SUPPLIED | | | | | | FORWARD END OF BOOM AT HOLES | AFT END OF BOOM AT HOLES AT 4mm SPACINGS |
|-----------|-----------------|-----|-----|-----|-----|-----|------------------------------|--|
| | B | C | D | E | F | G | | |
| 1 | 85 | 300 | 388 | 410 | 130 | 170 | | |
| 2 | 56 | 271 | 350 | 355 | 110 | 150 | | |
| 3 | 18 | 233 | 300 | 325 | 50 | 90 | | |